



Genesys Logic, Inc.

GL831A

**SATA to PATA
Bridge Controller**

Datasheet

Revision 1.02

Apr. 9, 2009



Copyright:

Copyright © 2009 Genesys Logic Incorporated. All rights reserved. No part of the materials may be reproduced in any form or by any means without prior written consent of Genesys Logic, Inc.

Disclaimer:

ALL MATERIALS ARE PROVIDED "AS IS" WITHOUT EXPRESS OR IMPLIED WARRANTY OF ANY KIND. NO LICENSE OR RIGHT IS GRANTED UNDER ANY PATENT OR TRADEMARK OF GENESYS LOGIC INC.. GENESYS LOGIC HEREBY DISCLAIMS ALL WARRANTIES AND CONDITIONS IN REGARD TO MATERIALS, INCLUDING ALL WARRANTIES, IMPLIED OR EXPRESS, OF MERCHANTABILITY, FITNESS FOR ANY PARTICULAR PURPOSE, AND NON-INFRINGEMENT OF INTELLECTUAL PROPERTY. IN NO EVENT SHALL GENESYS LOGIC BE LIABLE FOR ANY DAMAGES INCLUDING, WITHOUT LIMITATION, DAMAGES RESULTING FROM LOSS OF INFORMATION OR PROFITS. PLEASE BE ADVISED THAT THE MATERIALS MAY CONTAIN ERRORS OR OMMISIONS. GENESYS LOGIC MAY MAKE CHANGES TO THE MATERIALS OR TO THE PRODUCTS DESCRIBED THEREIN AT ANY TIME WITHOUT NOTICE.

Trademarks:



is a registered trademark of Genesys Logic, Inc.
All trademarks are the properties of their respective owners.

Office:

Genesys Logic, Inc.

12F, No. 205, Sec. 3, Beishin Rd., Shindian City,

Taipei, Taiwan

Tel: (886-2) 8913-1888

Fax: (886-2) 6629-6168

<http://www.genesyslogic.com>



Revision History

Revision	Date	Description
1.00	12/18/2008	First formal release
1.01	01/21/2009	Add Power Consumption, Ch6.5, p.15
1.02	04/09/2009	Modify features, Ch2, p.7 Modify Figure 3.1 - 64 Pin LQFP Pinout Diagram, p.8 Add Power output pin description, p. 11 Modify power consumption, Ch6.3.6, p.15

TABLE OF CONTENTS

CHAPTER 1	GENERAL DESCRIPTION.....	6
CHAPTER 2	FEATURES	7
CHAPTER 3	PIN ASSIGNMENT	8
3.1	PINOUTS.....	8
3.2	PIN LIST.....	9
3.3	PIN DESCRIPTIONS	9
CHAPTER 4	BLOCK DIAGRAM.....	12
CHAPTER 5	FUNCTION DESCRIPTION.....	13
5.1	PHY LAYER	13
5.2	LINK LAYER	13
5.3	TRANSPORT LAYER.....	13
5.4	APPLICATION LAYER	13
CHAPTER 6	ELECTRICAL CHARACTERISTICS.....	14
6.1	ABSOLUTE MAXIMUM RATINGS	14
6.2	TEMPERATURE CONDITIONS	14
6.3	DC CHARACTERISTICS	14
6.3.1	I/O Type digital pins	14
6.3.2	PATA Interface DC Characteristics	15
6.3.3	SATA Interface DC Characteristics	15
6.3.4	Reference Clock Input Requirement	15
6.3.5	Reference Resistor Requirement	15
6.3.6	Power Consumption.....	15
6.4	AC CHARACTERISTICS	16
6.4.1	PATA Interface AC Characteristics	16
6.4.2	SATA Interface AC Characteristics	16
CHAPTER 7	PACKAGE DIMENSION.....	17
CHAPTER 8	ORDERING INFORMATION	18



LIST OF FIGURES

FIGURE 3.1 - 64 PIN LQFP PINOUT DIAGRAM	8
FIGURE 4.1 - BLOCK DIAGRAM	12
FIGURE 7.1 — LQFP 64PIN PACKAGE.....	17

LIST OF TABLES

TABLE 3.1 - PIN LIST	9
TABLE 3.2 - PIN DESCRIPTIONS.....	9
TABLE 6.1 - MAXIMUM RATINGS	14
TABLE 6.2 - TEMPERATURE CONDITIONS	14
TABLE 6.3 - I/O TYPE DIGITAL PINS.....	14
TABLE 6.4 - REFERENCE CLOCK INPUT REQUIREMENT	15
TABLE 6.5 - REFERENCE RESISTOR REQUIREMENT.....	15
TABLE 6.6 - POWER CONSUMPTION	15
TABLE 8.1 - ORDERING INFORMATION	18



CHAPTER 1 GENERAL DESCRIPTION

The GL831 is a highly-compatible, low cost SATA to PATA and PATA to SATA bridge controller, which integrates Genesys Logic own design Serial ATA PHY. As a one-chip solution which complies with Serial ATA specification rev. 2.6 and ATA / ATAPI-6 specification rev 1.0, the GL831 can support various kinds of ATA / ATAPI device in SATA to PATA and SATA device in PATA to SATA. The GL831 uses 25MHz crystal and slew-rate controlled pads to reduce the EMI issue. With 64-pin LQFP (7mmX7mm) package, the GL831 is the best cost/ performance solution for SATA to PATA and PATA to SATA application.



CHAPTER 2 FEATURES

- Complies with ATA/ATAPI-6 specification rev 1.0.
- Support 16-bit Multiword DMA mode and Ultra DMA mode interface.
- Operating system supported: Win Vista/ Win XP / 2000 / Me / 98 / 98SE; Mac OS 9.X / X.
- Complies with Serial ATA specification rev. 2.6.
- Support SATA hot-plug.
- Support Spread Spectrum Clocking to reduce EMI.
- Provide adjustable TX signal amplitude and pre-emphasis level.
- Provide specified OOB signal detection and transmission.
- Supports both 1.5Gbps and 3Gbps Speed Negotiation.
- Supports both Host/Device controller configuration
- Support SATA 25MHz external crystal
- 3.3V power input; 5V tolerance pad.
- Embedded Regulator (3.3V to 1.8V).
- Available in 64-pin LQFP.

CHAPTER 3 PIN ASSIGNMENT

3.1 Pinouts



Figure 3.1 - 64 Pin LQFP Pinout Diagram

3.2 Pin List

Table 3.1 - Pin List

Pin#	Pin Name	Type	Pin#	Pin Name	Type	Pin#	Pin Name	Type	Pin#	Pin Name	Type
1	BUSY	O	17	DEVICE1	I	33	INTRQ	B	49	RTERM	A
2	DD7	B	18	HOST	I	34	VDD	P	50	PLLVD	P
3	DD8	B	19	DD2	B	35	CVDD	P	51	PLLVD	P
4	HRST_	I	20	DD13	B	36	DA1	B	52	PLLVSS	P
5	DD6	B	21	DD1	B	37	DA0	B	53	TXVSS	P
6	DD9	B	22	DD14	B	38	DA2	B	54	TXVDD	P
7	DD5	B	23	DD0	B	39	CS0_	B	55	TXP	O
8	CVDD	P	24	DD15	B	40	CS1_	B	56	TXN	O
9	VDD	P	25	CVDD	P	41	GND	P	57	RXN	I
10	GND	P	26	GND	P	42	VDD	P	58	RXP	I
11	DD10	B	27	VDD	P	43	GND	P	59	RXVDD	P
12	TEST	I	28	DMARQ	B	44	VDD	P	60	RXVSS	P
13	DD4	B	29	DIOW_	B	45	X2	B	61	CVDD	P
14	DD11	B	30	DIOR_	B	46	X1	I	62	GND	P
15	DD3	B	31	IORDY	B	47	CVDD	P	63	RESET#	B
16	DD12	B	32	DMACK_	B	48	GND	P	64	SPDSEL	I

3.3 Pin Descriptions

Table 3.2 - Pin Descriptions

ATA/ ATAPI Interface (Host mode)			
Pin Name	Pin#	Type	Description
DD0~15	23, 21, 19, 15, 13, 7, 5, 2, 3, 6, 11, 14, 16, 20, 22, 24	B	IDE Data Bus
RESET#	63	I (pu)	Device Reset
CS1_, CS0_	40, 39	I (pu)	Chip Select #1,#0
DA0~2	37, 36, 38	I (pd)	IDE Address #2,#1,#0

INTRQ	33	O	IDE interrupt input
DMACK_	32	I (pu)	IDE Acknowledge
IORDY	31	O	IDE Ready
DIOR_	30	I (pu)	IDE read signal
DIOW_	29	I (pu)	IDE write signal
DMARQ	28	O	IDE request

ATA/ ATAPI Interface (Device mode)			
Pin Name	Pin#	Type	Description
DD0~15	22, 20, 18, 15, 13, 7, 5, 2, 3, 6, 11, 14, 16, 19, 21, 23	B	IDE Data Bus
RESET#	63	O	Device Reset
CS1_, CS0_	40, 39	O	Chip Select #1,#0
DA0~2	37, 36, 38	O	IDE Address #2,#1,#0
INTRQ	33	I (pd)	IDE interrupt input
DMACK_	32	O	IDE Acknowledge
IORDY	31	I (pu)	IDE Ready
DIOR_	30	O	IDE read signal
DIOW_	29	O	IDE write signal
DMARQ	28	I (pd)	IDE request

SATA Interface			
Pin Name	Pin#	Type	Description
RTERM	49	A	Reference resistor
PLLVDD	50, 51	P	1.8V Power Supplies for internal PLL
PLLVSS	52	P	Ground for internal PLL
TXVSS	53	P	1.8V Power Supplies for transceiver part
TXVDD	54	P	Ground for transceiver part
TXP	55	O	SATA Differential Transmit TX+
TXN	56	O	SATA Differential Transmit TX-
RXN	57	I	SATA Differential Receive RX-



RXP	58	I	SATA Differential Receive RX+
RXVDD	59	P	1.8V Power Supplies for receiver part
RXVSS	60	P	Ground for receiver part

Digital Power and Ground			
Pin Name	Pin#	Type	Description
CVDD	8, 25, 35, 61	P	1.8V Digital Power (Pin 8 is internal regulator 3.3V to 1.8V output pin)
VDD	9, 27, 34, 42, 44	P	3.3V Digital Power (Pin 9 is internal regulator 3.3V to 1.8V input pin)
GND	10, 26, 41, 43, 120	P	Digital Ground

Miscellaneous Interface			
Pin Name	Pin#	Type	Description
TEST	12	I (pd)	Test Mode Input
X2	45	B	Crystal Output
X1	46	I	Crystal Input
HRST_	4	I (pu)	Reset Pin
HOST	18	I (pd)	1=> Host mode; 0=> Device mode
BUSY	1	O	Busy LED
SPDSEL	64	I (pd)	0 => force in 1.5G; 1 => negotiate interface speed with attached device (1.5G or 3G)
DEVICE1	17	I (pd)	0 => ATA device 0; 1=> ATA device 1 in host mode

Notation:

Type	O	Output
	I	Input
	B	Bi-directional
	B/I	Bi-directional, default input
	B/O	Bi-directional, default output
	P	Power / Ground
	A	Analog
	SO	Automatic output low when suspend
	pu	Internal pull up
	pd	Internal pull down
	odpu	Open drain with internal pull up

CHAPTER 4 BLOCK DIAGRAM

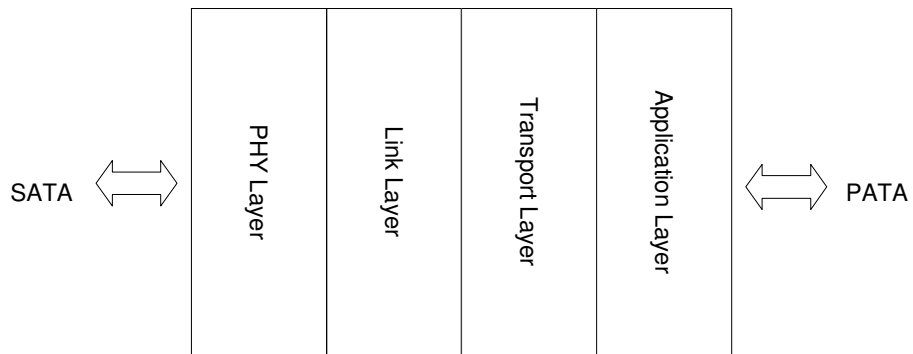


Figure 4.1 - Block Diagram



CHAPTER 5 FUNCTION DESCRIPTION

5.1 PHY Layer

It has elastic buffer and supports receiver detection, data serialization and de-serialization.

5.2 Link Layer

The Link layer transmits and receives frames, transmits primitives based on control signals from the Transport layer, and receives primitives from the Phy layer which are converted to control signals to the Transport layer.

5.3 Transport Layer

The Transport layer constructs Frame Information Structures for transmission and decomposes received Frame Information Structure

5.4 Application Layer

The Application Layer contains an ATA engine and translates the ATA operation onto internal protocols.

CHAPTER 6 ELECTRICAL CHARACTERISTICS

6.1 Absolute Maximum Ratings

Table 6.1 - Maximum Ratings

Symbol	Parameter	Min.	Typ.	Max.	Unit
V _{IO}	Digital I/O pad power supply voltage	3.0	3.3	3.6	V
V _{core}	Digital power supply voltage	1.62	1.8	1.98	V
V _{ASATA}	Analog power supply voltage for SATA PHY	1.62	1.8	1.98	V
V _{ESD}	Static discharge voltage	4000			V
T _A	Ambient Temperature	0		100	°C

6.2 Temperature Conditions

Table 6.2 - Temperature Conditions

Item	Value
Storage Temperature	-50°C ~ 150°C
Operating Temperature	0°C ~ 70°C

6.3 DC Characteristics

6.3.1 I/O Type digital pins

Table 6.3 - I/O Type digital pins

Parameter	Min.	Typ.	Max.	Unit
Current sink @ V _{OL} = 0.4V	10.58	14.21	16.87	mA
Current output @ V _{OH} = 2.4V (TTL high)	14.74	27.46	43.0	mA
Falling slew rate at 30 pF loading capacitance	0.56	0.91	1.28	V/ns
Rising slew rate at 30 pF loading capacitance	0.58	0.91	1.72	V/ns
Schmitt trigger low to high threshold point	1.4	1.5	1.6	V
Schmitt trigger low to high threshold point	1.4	1.5	1.6	V
Pad internal pull up resister	37.87K	64.7K	108.11K	Ohms
Pad internal pull down resister	29.85K	59.45K	134.26K	Ohms

6.3.2 PATA Interface DC Characteristics

The GL831 conforms to DC characteristics for ATA/ATAPI-6 specification rev 1.0. Please refer to this specification for more information.

6.3.3 SATA Interface DC Characteristics

The GL831 conforms to DC characteristics for Serial ATA specification rev. 2.6. Please refer to this specification for more information.

6.3.4 Reference Clock Input Requirement

Table 6.4 - Reference Clock Input Requirement

Parameter	Min.	Typ.	Max.	Unit
X1 crystal frequency		25		MHz
X1 cycle time		40		ns

6.3.5 Reference Resistor Requirement

Table 6.5 - Reference Resistor Requirement

Parameter	Min.	Typ.	Max.	Unit
SATA Reference Resistor		5.1K		Ohms

6.3.6 Power Consumption

Table 6.6 - Power Consumption

Symbol	Parameter	Min.	Typ.	Max.	Unit
I _{3.3V}	3.3V power Dissipation			135	mA
I _{5V}	5V power Dissipation			136	mA

Power Domain	Description	Voltage	Power Dissipation
IO	Digital Input/Output pad	3.3V	5mA
Crystal	Crystal pad		
Core	Digital core power supply	1.8V	126~128mA
SATA digital	SATA Serdes digital power		
SATA Analog	Analog power supply for SATA PHY		



6.4 AC Characteristics

6.4.1 PATA Interface AC Characteristics

The GL831 conforms to DC characteristics for ATA/ATAPI-6 specification rev 1.0. Please refer to this specification for more information.

6.4.2 SATA Interface AC Characteristics

The GL831 conforms to all timing diagrams and specifications for Serial ATA specification rev. 2.6. Please refer to this specification for more information.

CHAPTER 7 PACKAGE DIMENSION

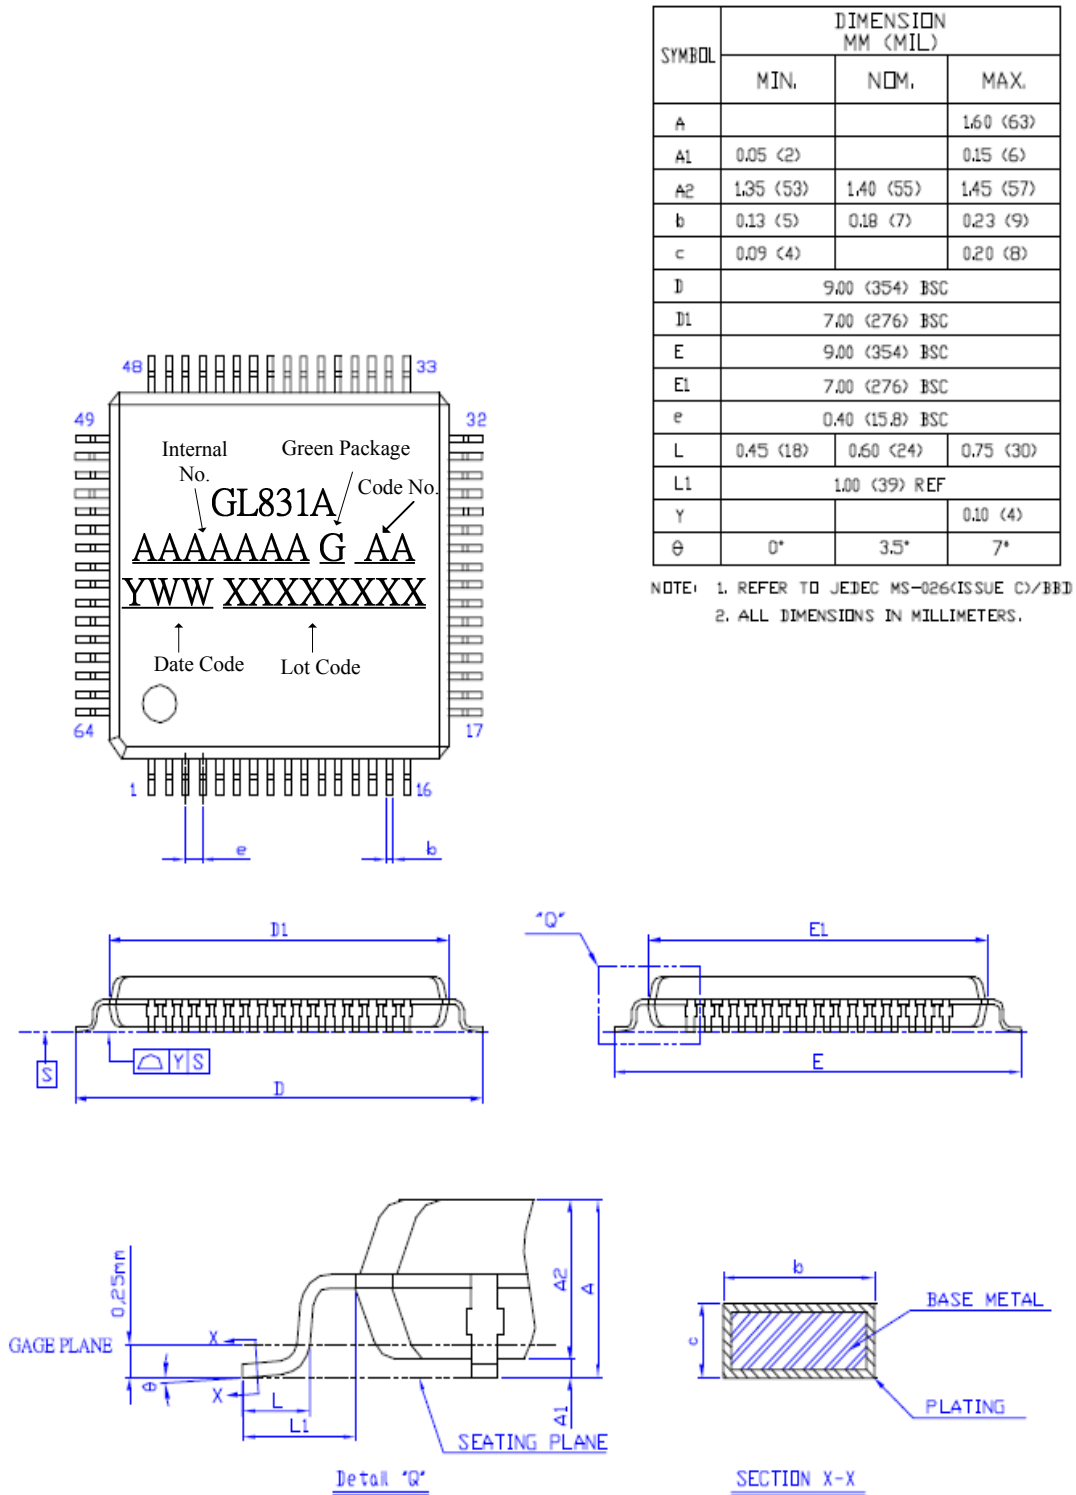


Figure 7.1 – LQFP 64pin package



CHAPTER 8 ORDERING INFORMATION

Table 8.1 - Ordering Information

Part Number	Package	Green	Version	Status
GL831A-MSGxx	64-pin LQFP	Green Package	xx	Available